

JC14 Rec'd PCT/PTO 07 DEC 2001

SUBSTITUTE FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER
12816-036001

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) **107009747**

INTERNATIONAL APPLICATION NO.
PCT/DE00/01770

INTERNATIONAL FILING DATE
30 May 2000

PRIORITY DATE CLAIMED
7 June 1999

TITLE OF INVENTION

GROUND KEY DETECTION CIRCUIT AND METHOD FOR INTERFERENCE-RESISTANT DETECTION OF THE ACTIVATION OF A GROUND KEY FOR TELEPHONES

APPLICANT(S) FOR DO/EO/US
Gerhard Nossing

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other documents or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - ☒ International Preliminary Examination Report
 - ☐
 - ☐
 - ☐
 - ☐

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. **2L 24547021705**

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the U.S. Patent and Trademark Office, P.O. Box 2327, Arlington, VA 22202

12-7-01
Date of Deposit

Signature

Typed Name of
Person Signing

Leroy Senkin

U.S. APPLICATION NO. (IF KNOWN) 10/009747		INTERNATIONAL APPLICATION NO. PCT/DE00/01770		ATTORNEY'S DOCKET NUMBER 12816-036001	
17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100 <div style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY	
Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	28 - 20 =	8	x \$18	\$144.00	
Independent Claims	2 - 3 =		x \$84	\$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$280	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,034.00	
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$1,034.00	
Processing fee of \$130 for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
TOTAL NATIONAL FEE =				\$0.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$0.00	
TOTAL FEES ENCLOSED =				\$1,034.00	
				Amount to be refunded:	\$
				Charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$1,034.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Ellen Sein Aye FISH & RICHARDSON P.C. 225 Franklin Street Boston, Massachusetts 02110-2804 (617) 542-5070 phone (617) 542-8906 facsimile			<div style="text-align: right;"> SIGNATURE: </div> <div style="text-align: right;"> Ellen Sein Aye NAME </div> <div style="text-align: right;"> Reg. No. 42,729 REGISTRATION NUMBER </div>		

10/309747

Attorney's Docket No.: 12816-036001 / S1139 GC/rfu

531 Rec'd PCT/PT 07 DEC 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Gerhard Nossing
Serial No. :
Filed : December 7, 2001
Title : GROUND KEY DETECTION CIRCUIT AND METHOD FOR
INTERFERENCE-RESISTANT DETECTION OF THE ACTIVATION OF A
GROUND KEY FOR TELEPHONES

Art Unit :
Examiner :

Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Prior to examination, please amend the application as follows:

In the claims:

Cancel claims 1-16.

Add claims 17-44.

-- 17. A circuit for interference-proof detection in the operation of a grounding key, the circuit comprising:

a current detection device configured to detect a current flowing when the grounding key is in operation;

a comparator configured to compare the detected current with at least one threshold value; and

a monitoring circuit configured to:

detect a first period when the current exceeds the threshold value;

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL 245470217 US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post, Office to Addressee with sufficient postage on the date indicated below and is addressed to the U.S. Patent and Trademark Office, P.O. Box 2327, Arlington, VA 22202.

Date of Deposit

Signature

Typed or Printed Name of Person Signing Certificate

12-7-01

Herby Jenkins

Herby Jenkins

10009747 "04-1102
2011-10-24 260007

detect a second period when the current drops below the threshold value;
and
output a grounding key detection signal when the first period is greater
than the second period.

18. The circuit of claim 17 wherein the comparator includes:

a first comparator circuit configured to compare the detected current with an
upper threshold value; and

a second comparator circuit configured to compare the detected current with a
lower threshold value.

19. The circuit of claim 18 wherein the monitoring circuit is configured to output the
grounding key detection signal when the first period of the current at the first comparator circuit
is greater than the second period.

20. The circuit of claim 18 wherein the monitoring circuit is configured to output the
grounding key detection signal when the second period of the current at the second comparator
circuit is greater than the first period.

21. The circuit of claim 17 wherein the monitoring circuit includes at least one
internal counter configured to count up when the upper threshold value has been exceeded by the
current and at least one internal counter configured to count down when the lower threshold
value has not been exceeded by the current.

22. The circuit of claim 21 wherein the monitoring circuit includes at least one
internal counter configured to count up when the lower threshold value has not been exceeded by
the current and at least one internal counter configured to count down when the lower threshold
value has been exceeded by the current.

10009747 "041102

23. The circuit of claim 22 wherein the internal counter is configured to perform a counting process for a predetermined period.

24. The circuit of claim 23 wherein the counting period is adjustable and configured to correspond to at least half of a period of an interference signal having a maximum interference frequency.

25. The circuit of claim 23 wherein the counting period is adjustable and configured to correspond to at least half of a period of an interference signal having a minimum interference frequency.

26. The circuit of claim 25 wherein the minimum interference frequency of the interference signal is a frequency from a group consisting of $16 \frac{2}{3}$ Hertz (Hz), 50Hz, 60Hz, or 120 Hz.

27. The circuit of claim 18 wherein the upper threshold value is positive 17 milli-Amperes (mA) and the lower threshold value is negative 17 mA.

28. The circuit of claim 17 wherein the monitoring circuit includes a polarity detection device configured to detect a polarity of the current.

29. The circuit of claim 28 wherein an internal counter of the polarity detection device is configured to count a number of polarity changes of the current.

30. The circuit of claim 29 wherein if a predetermined adjustable threshold count is exceeded, the polarity detection device is configured to output an external alternating current signal.

31. The circuit of claim 1 wherein the monitoring signal is configured to output the grounding key detection signal after a predetermined adjustable period has elapsed.

10009747-041102

32. The circuit of claim 31 wherein the predetermined adjustable period is 4 milliseconds (ms).

33. The circuit of claim 31 wherein an internal counter of the monitoring circuit detects a lapse of the predetermined adjustable period.

34. The circuit of claim 1 wherein the current detection device is an integrated circuit for digital telephone switching.

35. A method for interference-proof detection in the operation of a grounding key, the method comprising:

detecting a current flowing when the grounding key is in operation;
comparing the detected current with at least one threshold value;
detecting a first period during which the current exceeds the threshold value and
detecting a second period during which the current drops below the threshold value; and
outputting a grounding key detection signal when the first period is greater than the second period.

36. The method of claim 35 further comprising outputting the grounding key detection signal when the first period is greater than the second period and a predetermined adjustable period has elapsed.

37. The method of claim 35 further comprising:
comparing the detected current with an upper threshold value; and
comparing the detected current with a lower threshold value.

38. The method of claim 37 further comprising outputting the grounding key detection signal when the first period of the current at the first comparator circuit is greater than the second period.

10009747-04102

39. The method of claim 37 further comprising outputting the grounding key detection signal when the second period of the current at the second comparator circuit is greater than the first period.

40. The method of claim 37 further comprising counting up when the upper threshold value has been exceeded by the current and counting down when the lower threshold value has not been exceeded by the current.

41. The method of claim 37 further comprising counting up when the lower threshold value has not been exceeded by the current and counting down when the lower threshold value has been exceeded by the current.

42. The method of claim 37 further comprising counting processes for a predetermined period.

43. The method of claim 42 further comprising adjusting the predetermined period to correspond to at least half of a period of an interference signal having a maximum interference frequency.

44. The method of claim 42 further comprising adjusting the counting period to correspond to at least half of a period of an interference signal having a minimum interference frequency. --

In the abstract:

Replace the abstract with the following version.

-- A grounding key detecting device and method for interference-proof detection of the operation of grounding keys in telephones. A circuit that detects the operation of a grounding key includes a current detection device configured to detect a current flowing when the

1006974-04102
2011-12-07 10:00:00

Applicant : Gerhard Nossing
Serial No. :
Filed : December 7, 2001
Page : 6

Attorney's Docket No.: 12816-036001 / S1139 GC/rfu

grounding key is in operation, a comparator configured to compare the detected current with at least one threshold value, and a monitoring circuit configured to detect a first period when the current exceeds the threshold value, detect a second period when the current drops below the threshold value, and output a grounding key detection signal when the first period is greater than the second period. --

2007-10-24 10:09:47

Applicant : Gerhard Nossing
Serial No. :
Filed : December 7, 2001
Page : 7

Attorney's Docket No.: 12816-036001 / S1139 GC/rfu

REMARKS

The specification has been amended to cancel claims 1-16 and claims 17-44 have been added.

Attached is a marked-up version of the changes being made by the current amendment.

Applicant asks that all claims be examined. Please apply any other charges or credits to Deposit Account No. 06-1050.

Respectfully submitted,

Date: December 7, 2001

Ellen Sein Aye
Ellen Sein Aye
Reg. No. 42,729

Fish & Richardson P.C.
225 Franklin Street
Boston, Massachusetts 02110-2804
Telephone: (617) 542-5070
Facsimile: (617) 542-8906

20355597.doc

20355597.doc

10/009747

581 Rec'd PCH/FT 07 DEC 2001

Version with markings to show changes made

In the claims:

Claims 1-16 have been cancelled.

Claims 17-44 have been added:

-- 17. A circuit for interference-proof detection in the operation of a grounding key, the circuit comprising:

a current detection device configured to detect a current flowing when the grounding key is in operation;

a comparator configured to compare the detected current with at least one threshold value; and

a monitoring circuit configured to:

detect a first period when the current exceeds the threshold value;

detect a second period when the current drops below the threshold value;

and

output a grounding key detection signal when the first period is greater than the second period.

18. The circuit of claim 17 wherein the comparator includes:

a first comparator circuit configured to compare the detected current with an upper threshold value; and

a second comparator circuit configured to compare the detected current with a lower threshold value.

19. The circuit of claim 18 wherein the monitoring circuit is configured to output the grounding key detection signal when the first period of the current at the first comparator circuit is greater than the second period.

2009747-04102

20. The circuit of claim 18 wherein the monitoring circuit is configured to output the grounding key detection signal when the second period of the current at the second comparator circuit is greater than the first period.

21. The circuit of claim 17 wherein the monitoring circuit includes at least one internal counter configured to count up when the upper threshold value has been exceeded by the current and at least one internal counter configured to count down when the lower threshold value has not been exceeded by the current.

22. The circuit of claim 21 wherein the monitoring circuit includes at least one internal counter configured to count up when the lower threshold value has not been exceeded by the current and at least one internal counter configured to count down when the lower threshold value has been exceeded by the current.

23. The circuit of claim 22 wherein the internal counter is configured to perform a counting process for a predetermined period.

24. The circuit of claim 23 wherein the counting period is adjustable and configured to correspond to at least half of a period of an interference signal having a maximum interference frequency.

25. The circuit of claim 23 wherein the counting period is adjustable and configured to correspond to at least half of a period of an interference signal having a minimum interference frequency.

26. The circuit of claim 25 wherein the minimum interference frequency of the interference signal is a frequency from a group consisting of $16 \frac{2}{3}$ Hertz (Hz), 50Hz, 60Hz, or 120 Hz.

2017-10-24 10:44:47

27. The circuit of claim 18 wherein the upper threshold value is positive 17 milli-Amperes (mA) and the lower threshold value is negative 17 mA.

28. The circuit of claim 17 wherein the monitoring circuit includes a polarity detection device configured to detect a polarity of the current.

29. The circuit of claim 28 wherein an internal counter of the polarity detection device is configured to count a number of polarity changes of the current.

30. The circuit of claim 29 wherein if a predetermined adjustable threshold count is exceeded, the polarity detection device is configured to output an external alternating current signal.

31. The circuit of claim 1 wherein the monitoring signal is configured to output the grounding key detection signal after a predetermined adjustable period has elapsed.

32. The circuit of claim 31 wherein the predetermined adjustable period is 4 milliseconds (ms).

33. The circuit of claim 31 wherein an internal counter of the monitoring circuit detects a lapse of the predetermined adjustable period.

34. The circuit of claim 1 wherein the current detection device is an integrated circuit for digital telephone switching.

35. A method for interference-proof detection in the operation of a grounding key, the method comprising:

detecting a current flowing when the grounding key is in operation;
comparing the detected current with at least one threshold value;

2016-12-07 10:44:10

detecting a first period during which the current exceeds the threshold value and
detecting a second period during which the current drops below the threshold value; and
outputting a grounding key detection signal when the first period is greater than
the second period.

36. The method of claim 35 further comprising outputting the grounding key
detection signal when the first period is greater than the second period and a predetermined
adjustable period has elapsed.

37. The method of claim 35 further comprising:
comparing the detected current with an upper threshold value; and
comparing the detected current with a lower threshold value.

38. The method of claim 37 further comprising outputting the grounding key
detection signal when the first period of the current at the first comparator circuit is greater than
the second period.

39. The method of claim 37 further comprising outputting the grounding key
detection signal when the second period of the current at the second comparator circuit is greater
than the first period.

40. The method of claim 37 further comprising counting up when the upper threshold
value has been exceeded by the current and counting down when the lower threshold value has
not been exceeded by the current.

41. The method of claim 37 further comprising counting up when the lower threshold
value has not been exceeded by the current and counting down when the lower threshold value
has been exceeded by the current.

2005747-041102

42. The method of claim 37 further comprising counting processes for a predetermined period.

43. The method of claim 42 further comprising adjusting the predetermined period to correspond to at least half of a period of an interference signal having a maximum interference frequency.

44. The method of claim 42 further comprising adjusting the counting period to correspond to at least half of a period of an interference signal having a minimum interference frequency. --

In the abstract:

Replace the abstract with the following version.

-- A grounding key detecting device and method for interference-proof detection of the operation of grounding keys in telephones. A circuit that detects the operation of a grounding key includes a current detection device configured to detect a current flowing when the grounding key is in operation, a comparator configured to compare the detected current with at least one threshold value, and a monitoring circuit configured to detect a first period when the current exceeds the threshold value, detect a second period when the current drops below the threshold value, and output a grounding key detection signal when the first period is greater than the second period. --

2011-01-04 10:44:24

4/PRTS

10/009747
531 Rec'd PCT. 07 DEC 2001

Description

Grounding key detection circuit and method for
interference-proof detection of the operation of a
5 grounding key in telephones

The invention relates to a grounding key detection
circuit for interference-proof detection of the
operation of a grounding key in a telephone and a
10 corresponding method for interference-proof detection
of the operation of a grounding key in telephones.

If an exchange line call has been set up in a
telephone, a so-called inquiry call can be initiated by
15 operating the grounding key. The exchange line
interface maintains the existing call and switches the
inquiries of the extension to an inquiry call
subscriber line circuit. From the inquiry call
subscriber line circuit, an internal call can be set
20 up. The exchange line call can be transferred to
another subscriber via this inquiry call path.

In digital switching systems, the telephone set is
connected to an integrated semiconductor chip which
25 handles the so-called BORSCHT functions. This
integrated semiconductor circuit is generally called an
SLIC (subscriber line interface circuit) circuit.
"BORSCHT" is an artificial word to describe more easily
the functions of a subscriber line circuit within a
switching center. The word "BORSCHT" is composed of the
30 initial letters of the designation for the various
functions of such an SLIC semiconductor circuit. These
functions include the battery feed, the overvoltage
protection, the ringing, the signaling, the coding, the
35 hybrid and the provision for testing.

In US patent US 5 659 570, an integrated SLIC circuit
is described which contains a grounding key detection
circuit. In this arrangement, the SLIC circuit is

10009747.041102

connected to the telephone set with grounding key via two telephone connecting lines, the grounding key detection circuit contained in the SLIC circuit detecting an unbalance of the currents flowing in the two connecting lines to output a grounding key detection signal when the grounding key is operated at the telephone set. The two currents flowing in the connections are in each case compared with reference currents which are generated by two reference current sources. The two reference currents generated by the reference current sources are of equal magnitude. If the current I_T (T: tip) in the first telephone set connecting line is greater than the sum of the current I_R (R: ring) flowing in the second telephone set connecting line and the reference current generated by the first reference current source or if the current I_R flowing in the second telephone connecting line is greater than the sum of the current I_T flowing in the first telephone connecting line and the reference current generated by the second reference current source, the grounding key detection circuit of the integrated SLIC circuit detects an operation of the grounding key of the telephone set and outputs a grounding key detection signal.

Though current interference signals on the telephone connecting lines do not lead to false grounding key detections, the imbalance of the currents I_T and I_R flowing in the telephone connecting lines must persist for a certain period of time. An imbalance of the two currents flowing in the telephone connecting lines is also called a longitudinal current. As soon as this longitudinal current exceeds a particular threshold current for a particular guard period, a grounding key detection signal is output in such conventional grounding key detection circuits.

In grounding key detection circuits according to the prior art, a disadvantage exists, nevertheless, in that

10009747.041102

sinusoidal current disturbances in the telephone connecting lines which are capacitively coupled into the lines could lead to the current threshold being undershot again for a short period of time before the period of guard time has elapsed. If, for example, the guard period is 4 ms and the detected longitudinal current drops below the current threshold due to a superimposed sinusoidal interference current before the guard period of 4 ms is reached, the operating of the grounding key is not detected even if the longitudinal current exceeds the current threshold again within a very short time after it has dropped below it. The capacitively injected sinusoidal interference currents can periodically push the longitudinal current produced below the threshold value at the wave dips due to the operating of the grounding key before the set guard time has in each case elapsed. The operating of the grounding key is not detected in such a case.

It is the object of the present invention, therefore, to create a grounding key detection circuit and a corresponding method for detecting the grounding key operation in telephones, which circuit and method are interference-proof against injected alternating interference currents and reliably detect the operation of a grounding key even in the presence of injected alternating interference currents.

According to the invention, this object is achieved by a grounding key detection circuit having the features specified in patent claim 1 and by a method for the interference-proof detection of the operation of a grounding key in telephones having the features specified in patent claim 15.

Further advantageous embodiments of the grounding key detection circuit according to the invention and of the method, according to the invention, for the interference-proof detection of the operation of a

10009747-041102

grounding key in telephones are specified in the subclaims.

10009747, 041102

The invention creates a grounding key detection circuit for interference-proof detection of the operation of a grounding key in a telephone comprising a longitudinal current detection device for detecting a longitudinal current flowing when the grounding key is operated, at least one comparator for comparing the detected longitudinal current with a threshold value, a monitoring circuit for monitoring the overshoot period for which the detected longitudinal current exceeds the threshold value and for detecting an undershoot period for which the longitudinal current drops below the threshold value, the monitoring circuit outputting a grounding key detection signal when the overshoot period is greater than the undershoot period.

In a preferred further development of the grounding key detection circuit according to the invention, said circuit contains a first comparator for comparing the detected longitudinal current with an upper threshold value and a second comparator for comparing the detected longitudinal current with a lower threshold value, the monitoring device detecting the overshoot period and the undershoot period of the two threshold values and outputting a grounding key detection signal when the overshoot period of the longitudinal current at the first comparator is greater than the undershoot period or when the undershoot period of the longitudinal current at the second comparator is greater than the overshoot period.

This provides the particular advantage that the operation of the grounding key can be reliably detected independently of the polarity of the longitudinal current flowing.

In a further advantageous embodiment of the grounding key detection circuit according to the invention, the monitoring circuit contains an internal up/down counter which counts up after the upper threshold value has been exceeded and counts down after the lower threshold value has been undershot.

This provides the special advantage that the time can be detected in a simple manner with minimum circuit expenditure.

In a further advantageous embodiment of the grounding key detection circuit according to the invention, the monitoring circuit contains an internal up/down counter which counts up when the lower threshold value has been undershot and counts down when the lower threshold value has been exceeded.

This provides the particular advantage that the operation of the grounding key can be detected in a simple manner and with minimum circuit expenditure independently of the longitudinal current caused thereby.

In a further preferred embodiment of the grounding key detection circuit according to the invention, the internal counter of the monitoring circuit performs the up/down counting process for a predetermined adjustable counting period after the upper threshold value has been exceeded or after the lower threshold value has been undershot.

This provides the particular advantage that the grounding key detection circuit can be adapted to the frequencies or time periods of the alternating current interference signals to be expected.

In a further advantageous embodiment of the grounding key detection circuit according to the invention, the

10009747-041102

adjustable counting period is set to half the period of an interference signal to be expected which has a maximum interference period and/or a minimum interference frequency, respectively.

5

This provides the special advantage that only the frequency corresponding to the frequency of the interference signal to be expected, which has a minimum interference frequency, needs to be set. The remaining interference signals with higher interference frequencies are automatically also suppressed and do not influence the detection process of the grounding key operation in the grounding key detection circuit according to the invention.

15

In a further advantageous embodiment of the grounding key detection circuit according to the invention, the adjustable counting period corresponds to half the period of interference signals having an interference signal frequency of $16 \frac{2}{3}$ Hz, 50 Hz, 60 Hz or 120 Hz.

When the adjustable counting period is set to half the period of a sinusoidal interference signal having a minimum interference frequency of $16 \frac{2}{3}$ Hz, this has the particular advantage that the remaining interference signals having interference signal frequencies of 50 Hz, 60 Hz or 120 Hz are also suppressed.

In a further advantageous embodiment of the grounding key detection circuit according to the invention, the upper threshold value is about +17 mA and the lower threshold value is about -17 mA.

In a further advantageous embodiment of the grounding key detection circuit according to the invention, the number of polarity changes of the longitudinal current is counted by a further internal counter of a polarity detection device within the monitoring circuit and,

10009747.04.102

when a predetermined adjustable threshold count is exceeded, an external alternating current detection signal is output by the monitoring circuit.

- 5 This provides the special advantage that a faulty application of an external alternating current or of an external voltage to one of the two telephone connecting lines can be immediately detected.
- 10 In a further advantageous embodiment of the grounding key detection circuit according to the invention, the grounding key detection signal is only output after a predetermined adjustable guard period has elapsed.
- 15 In a further advantageous embodiment of the grounding key detection circuit according to the invention, the adjustable guard period is about 4 ms.

- 20 This provides the advantage that short-term disturbances can be suppressed and, at the same time, it is possible to suppress disturbances with frequencies of up to 120 Hz.

- 25 In a further advantageous embodiment of the grounding key detection circuit according to the invention, the expiry of the guard period is detected by the internal up/down counter of the monitoring circuit.

- 30 This provides the special advantage that the guard period can be detected in a simple manner without an additional separate counter.

- 35 In a further advantageous embodiment of the grounding key detection circuit according to the invention, the longitudinal current detection device is an integrated circuit for digital telephone switching (SLIC).

10009747, 04.1.02

This provides the special advantage that the longitudinal current can be detected by means of standard integrated semiconductor chips.

5 A preferred embodiment of the grounding key detection circuit according to the invention will be described for explaining features essential to the invention, referring to the attached drawings, in which:

10 Figure 1 shows a block diagram of the grounding key detection circuit according to the invention.

Figure 2 shows a preferred embodiment of the grounding key detection circuit according to the invention, shown
15 in figure 1.

Figure 3 shows a first example of the signal variation of a detected longitudinal current and the associated counter signal variation for explaining the grounding
20 key operation detection according to the invention.

Figure 4 shows a second example of the signal variation of a longitudinal current and the associated counter signal variation for explaining the grounding key
25 operation detection according to the invention.

Figure 5 shows a third example of a signal variation of the longitudinal current and the associated counter signal variation for explaining the grounding key
30 operation detection according to the invention.

Figure 1 shows the basic configuration of the grounding key detection circuit according to the invention.

35 A telephone set 1 is connected to a longitudinal current detection device 4 via a first telephone connecting line 2 and via a second telephone connecting line 3. The second telephone connecting line 3 contains a branch-off node to which a grounding key 6 belonging

10009747, 041102

to the telephone connecting set 1 is connected and is connected to ground. The longitudinal current detection device 4 is preferably an SLIC semiconductor circuit having an integrated longitudinal current detection function. The output of the longitudinal current detection device 4 is connected to a comparator 6 via an output line 5. The detected longitudinal current output via the output line 5 is compared with a threshold current value by the comparator 6. The comparator 6 is connected to a monitoring circuit 8 via an output line 7. The monitoring circuit 8 detects the overshoot period, i.e. the period for which the longitudinal current exceeds the current threshold value set, and the undershoot period, i.e. the period in which the longitudinal current drops below the current threshold value set, and outputs a grounding key detection signal via the line 9 when the overshoot period is longer than the undershoot period.

Figure 2 shows a preferred embodiment of the grounding key detection circuit according to the invention, shown in figure 1. Identical reference symbols designate comparable components.

The longitudinal current detected by the longitudinal current detection device 4 is converted into a measurement voltage by means of a current/voltage transformer 10 via the output line 5. As shown in figure 2, the current/voltage transformer preferably consists of a resistor connected to ground. The measurement voltage present across the resistor 10, which reproduces the longitudinal current which has occurred, is applied to two comparator circuits 11, 12 of the comparator. The inputs of the comparator circuits 11, 12 are connected to the output line 5 of the longitudinal current detection circuit 4. The comparator circuits 11, 12 of the comparator 6 compare the voltage present across the resistor 10 with adjustable threshold voltages.

10009747.041102

In a preferred embodiment, the adjustable threshold voltages of the comparator circuits 11, 12 are connected to an input device 14 via an adjusting line 13. In this arrangement, the threshold voltages at the comparator circuits 11, 12 or, respectively, the threshold currents, can be adjusted by the input device 14. The comparator circuits 11, 12 of the comparator 6 have output lines 7a, 7b. If the longitudinal current present at the output line 5 of the longitudinal current detection device 4 exceeds an adjustable upper current threshold value at the telephone connecting lines 2, 3 of the telephone set 1, the comparator circuit 11 outputs a corresponding detection signal to the monitoring circuit 8 via the output line 7a. If the detected longitudinal current present at the longitudinal current detection device 4 undershoots a particular adjustable lower current threshold value, the second comparator circuit 12 outputs a corresponding detection signal to the monitoring circuit 8 via the output line 7b.

The monitoring device 8 detects the overshoot period and the undershoot period and outputs a grounding key detection signal via the output line 9 when the overshoot period of the longitudinal current output at the output line 5, which is detected by the first comparator circuit 11, is greater than the undershoot period of the longitudinal current, or when the undershoot period of the longitudinal current, which is detected at the second comparator circuit 12, is greater than the overshoot period.

For this purpose, the monitoring circuit 8 contains an internal up/down counter which counts up after the upper current threshold value has been exceeded and counts down when the upper current threshold value has been undershot. The monitoring circuit 8 also contains a second internal up/down counter which counts up when the lower current threshold value is undershot and

counts down when the upper current threshold value is exceeded.

The monitoring circuit 8 is preferably connected to the
5 input device 14 via adjusting lines 15. The internal
counters of the monitoring circuit 8 perform the
up/down counting process for a predetermined adjustable
counting period after the upper threshold value has
been exceeded or, respectively, after the lower
10 threshold value has been undershot. The counting
periods of the internal counters of the monitoring
circuit 8 can be adjusted or set, respectively, via the
adjusting line 15 with the aid of the input device 14
in accordance with the requirements of the grounding
15 key detection circuit according to the invention.

The monitoring circuit 8 additionally contains a
current polarity detection device by means of which the
polarity changes of the longitudinal current are
20 detected. For this purpose, the current polarity
detection device contains another internal counter
which outputs an external alternating current detection
signal via the output line 16 of the monitoring circuit
8 when a predetermined threshold count is exceeded. If
25 the polarity of the detected longitudinal current
continuously changes, this is due to the fact that the
telephone connecting lines 2, 3 of the telephone
connection 1 have been accidentally connected to an
external alternating voltage or are unintentionally in
30 contact with such a voltage. The internal counter of
the current polarity detection device is incremented to
a target threshold value within a certain period which
is inversely proportional to the frequency of the
external voltage present. The frequency of the external
35 alternating voltage present across connecting lines 2,
3 can be calculated, and indicated via a display device
(not shown), by measuring this period, for example by
means of an internal clock signal.

10009747-041102

As already mentioned, the monitoring circuit contains a first internal up/down counter which counts up after the upper adjustable current threshold value has been exceeded and counts down after the adjustable upper
5 current threshold value has been undershot, and a second internal up/down counter which counts up when the lower current threshold value has been undershot and counts down when the lower current threshold value has been exceeded. The period for which the up/down
10 counting process is performed by the two internal counters is preferably set externally via the input device 14.

In a preferred embodiment, the adjustable counting
15 period of the internal counters is set to half the period of a sinusoidal alternating current interference signal to be expected, which has a maximum interference period or, respectively, a minimum interference frequency. The minimum interference frequency of the
20 interference signal to be expected is $16 \frac{2}{3}$ Hz, 50 Hz, 60 Hz or 120 Hz. These are the current-voltage frequencies of the rail network of the European alternating current system or of the American alternating current system. The adjustable counting
25 period of the internal counters is preferably set to half the period of the rail network which has a minimum interference frequency of $16 \frac{2}{3}$ Hz, that is to say to 30 ms at a period of 60 ms. With this setting, the remaining interference frequencies of 50 Hz, 60 Hz and
30 120 Hz are also automatically suppressed. In a preferred embodiment, the upper current threshold value adjustable at the comparator-6 is +17 mA and the lower current threshold value is -17 mA. The two threshold values are preferably balanced with respect to a zero
35 current.

The grounding key detection signal output via the grounding key detection signal line 9 is preferably only output after a predetermined guard period, which

10009747, 041102

is adjustable via an adjusting line 15, has elapsed. This guard period is preferably about 4 ms. The expiry of the guard period is detected by the internal up/down counters within the monitoring circuit 8.

5

In the text which follows, the operation of the preferred embodiment of the grounding key detection circuit according to the invention, shown in figure 2, will be explained, referring to figures 3 to 5 for various signal variations of the longitudinal current I detected in the telephone connecting lines 2, 3.

Figure 3 shows the variation of a typical longitudinal current I in telephone connecting lines 2, 3 and the signal variation of an associated internal counter in the monitoring circuit 8.

After the grounding key 6 has been closed, an interference sensitive longitudinal current, which is detected by the longitudinal current detection device 4, arises at the telephone set connecting lines 2, 3 of the telephone connection 1. The longitudinal current detected at output connection 5 amounts to the difference between the current flowing in connecting line 2 and that flowing in connecting line 3 divided by a factor of 2. By closing the grounding key 6, the longitudinal current I_L indicates up to time T_1 at which it exceeds an upper current threshold value I_{SO} . This overshooting is detected by means of the first comparator circuit 11 in comparator 6 and a detection signal is output to the monitoring circuit 8 via this signal line 7a.

After the threshold overshoot by the longitudinal current I_L has been detected, a first internal counter of the monitoring circuit 8 begins to count up, i.e. it is continuously incremented. Since the longitudinal current I_L remains continuously above the upper current threshold value I_{SO} in the example shown in figure 3,

10009747 041102

the internal counter continuously counts up until the adjustable counting period of 30 ms is reached at time T_2 . At this time T_2 , the monitoring circuit 8 detects the operation of the grounding key 6 and outputs a grounding key detection signal via the output lines 9.

Figure 4 shows another exemplary signal variation for the longitudinal current I_L . In the example shown in figure 4, the longitudinal current I_L increases after the grounding key 6 has been closed and exceeds the upper current threshold value I_{S0} at time T_1 . However, the internal counter of the monitoring circuit 8 is incremented until the longitudinal current I_L again drops below the upper threshold value at time T_2 . The internal counter is constructed as up/down counter and is counted down again, or incremented, respectively, after the output threshold value is undershot. At time T_3 , the longitudinal current I_L again exceeds the upper threshold value I_{S0} and the internal counter counts up again until the longitudinal current drops below the upper threshold value again at time T_4 . After that, the internal counter is counted down to zero again in the example shown since the longitudinal current continuously remains below the upper threshold value.

In a preferred embodiment of the grounding key detection circuit according to the invention, a predetermined guard time can be additionally input into the monitoring circuit 8 via the adjusting line 15. In the example shown in figure 4, the guard time is 4 ms. Since the internal counter does not exceed the guard time of 4 ms at any point--in the example shown in figure 4, no grounding key detection signal is output.

Figure 5 shows by way of example the signal variation of the longitudinal current I_L and the associated signal variation of the internal counter accommodated in the monitoring circuit 8.

10009747-041102

In the example shown in figure 5, the longitudinal current I_L exceeds the upper threshold value I_{S0} at time T_1 as a result of which the internal counter is incremented. At time T_2 , the longitudinal current drops below the upper threshold value and the direction of counting of the internal counter is reversed and it is decremented up to time T_3 . At time T_3 , the longitudinal current again exceeds the upper threshold value and remains above the upper current threshold value in the first variant I_{LA} of the signal variation shown and drops below the upper current threshold value again at time T_4 in the second variant I_{LB} shown.

As can be seen from figure 5, the counter is decremented at time T_2 when the upper current threshold value is undershot again, and at time T_3 , at which the longitudinal current again exceeds the upper threshold value, a check is made whether the counter has a count of greater than zero, and this is stored. The counter is reset when the upper current threshold value is exceeded and again begins incrementing at time T_3 .

In the second variant (I_{LB}), shown in figure 5, the counter is reset to zero after the upper current threshold value is undershot at time T_4 . It is only after the adjustable minimum guard period is passed through again at time T_5 that a grounding key detection signal is output via the grounding key detection signal line 9 in the first variant (I_{LA}) of the signal variation of the longitudinal current I_L , shown in figure 5. Conversely, no grounding key detection signal is generated in the second variant I_{LB} of the signal variation, shown in figure 5, in which the counter Z_B is decremented again before the guard time of 4 ms has been reached.

The grounding key detection signal can preferably be produced by setting a grounding key detection bit or grounding key detection flag, respectively. The

10009747, 04.1.102

grounding key detection flag or grounding key detection bit set triggers, for example, a maskable interrupt procedure in the higher-level firmware.

5 As can be seen from the exemplary signal variation shown in figure 4, no grounding key detection signal is output when the overshoot period with which the longitudinal current exceeds the upper current threshold value I_{SO} (period between time T_1 and T_2) is
10 greater than the undershoot period with which the longitudinal current I_L drops below the upper current threshold value I_{SO} (period between time T_2 and T_3), because the adjustable guard time of 4 ms has not yet elapsed.

15 Thus, the grounding key detection device according to the invention makes it possible both to suppress sinusoidal interference currents in the grounding key detection and to retain a guard period.

20 Furthermore, external voltages present across the connecting lines can be detected and their frequency can be indicated.

25 Apart from the interference immunity with respect to sinusoidal current injections, the grounding key protection device according to the invention also provides protection against signal fluctuations due to switch bounce or due to transient processes.

10009747.041102

Patent Claims

1. A grounding key detection circuit for interference-proof detection of the operation of a grounding key in a telephone comprising:
- 5 a longitudinal current detection device (4) for detecting a longitudinal current flowing when the grounding key (6) is operated,
- 10 a comparator (6) for comparing the detected longitudinal current with at least one threshold value,
- 15 a monitoring circuit (8) for detecting an overshoot period for which the longitudinal current exceeds the current threshold value and for detecting an undershoot period for which the longitudinal current drops below the current threshold value, the monitoring circuit (8) outputting a grounding key detection signal when the overshoot period is greater than the undershoot period.
- 20
2. The grounding key detection circuit for interference-proof detection of the operation of a grounding key as claimed in claim 1, wherein the
- 25 comparator (6) has a first comparator circuit (11) and a second comparator circuit (12), the first comparator circuit (11) being provided for comparing the detected longitudinal current with an upper current threshold value and the second comparator circuit (12) being provided for
- 30 comparing the detected longitudinal current with a lower current threshold-value, and wherein the monitoring circuit (8) detects the overshoot period and the undershoot period of the two current threshold values and outputs a grounding
- 35 key detection signal when the overshoot period of the longitudinal current at the first comparator circuit (1) is greater than the undershoot period, or when the undershoot period of the longitudinal

20110426007

current at the second comparator circuit (12) is greater than the overshoot period.

3. The grounding key detection circuit as claimed in claim 1 or 2, wherein the monitoring circuit (8) contains at least one internal up/down counter which counts up after the upper current threshold value has been exceeded and counts down after the lower current threshold value has been undershot.
4. The grounding key detection circuit as claimed in one of claims 1 to 3, wherein the monitoring circuit (8) contains an internal up/down counter which counts up after the lower current threshold value has been undershot and counts down after the lower current threshold value has been exceeded.
5. The grounding key detection circuit as claimed in claim 3 or 4, wherein the internal counters perform the up/down counting processes for a predetermined adjustable counting period after the threshold values have been exceeded/undershot.
6. The grounding key detection circuit as claimed in claim 5, wherein the adjustable counting period corresponds to half the period of an interference signal which has a maximum interference period and/or minimum interference frequency, respectively.
7. The grounding key detection circuit as claimed in claim 6, wherein the minimum interference frequency of the interference signal is $16 \frac{2}{3}$ Hz, 50 Hz, 60 Hz or 120 Hz.
8. The grounding key detection circuit as claimed in one of the preceding claims, wherein the upper current threshold value is about +17 mA and the lower current threshold value is about -17 mA.

9. The grounding key detection circuit as claimed in claim 1 to 8, wherein the monitoring circuit (8) contains a current polarity detection device for detecting the polarity of the longitudinal current.
10. The grounding key detection circuit as claimed in claim 9, wherein the number of polarity changes of the longitudinal current is counted by an internal counter of the current polarity detection device and, when a predetermined adjustable threshold count is exceeded, an external alternating current detection signal is output by the current polarity detection device.
11. The grounding key detection circuit as claimed in claim 1 to 10, wherein the grounding key detection signal can only be output after a predetermined adjustable guard period has elapsed.
12. The grounding key detection circuit as claimed in claim 11, wherein the adjustable guard period is about 4 ms.
13. The grounding key detection circuit as claimed in claim 11 or 12, wherein the expiry of the adjustable guard period is detected by the internal up/down counters of the monitoring circuit (8).
14. The grounding key detection circuit as claimed in claim 1 to 13, wherein the longitudinal current detection device (4) is an integrated circuit for digital telephone switching (SLIC).
15. A method for the interference-proof detection of the operation of a grounding key in a telephone, comprising the following steps:

- 5 (a) detecting a longitudinal current flowing when
the grounding key (6) is operated;
- (b) comparing the detected longitudinal current
with a current threshold value;
- 10 (c) detecting an overshoot period, for the
duration of which the longitudinal current
exceeds the current threshold value, and an
undershoot period, for the duration of which
the longitudinal current drops below the
current threshold value;
- 15 (d) outputting a grounding key detection signal
when the overshoot period is greater than the
undershoot period.
16. The method as claimed in claim 15, wherein the
grounding key detection signal is output when the
20 overshoot period is greater than the undershoot
period and additionally an adjustable guard period
has elapsed.

10009747, 044102

Abstract

Grounding key detection circuit and method for interference-proof detection of the operation of a grounding key in telephones

Grounding key detection circuit for interference-proof detection of the operation of a grounding key in a telephone, comprising:

a longitudinal current detection device (4) for detecting a longitudinal current flowing when the grounding key (6) is operated,

a comparator (6) for comparing the detected longitudinal current with a threshold value,

a monitoring circuit (8) for detecting an overshoot period for which the longitudinal current exceeds the current threshold value and for detecting an undershoot period for which the longitudinal current drops below the current threshold value, the monitoring circuit (8) outputting a grounding key detection signal when the overshoot period is greater than the undershoot period.

Figure 1

10009747.043102

FIG 1

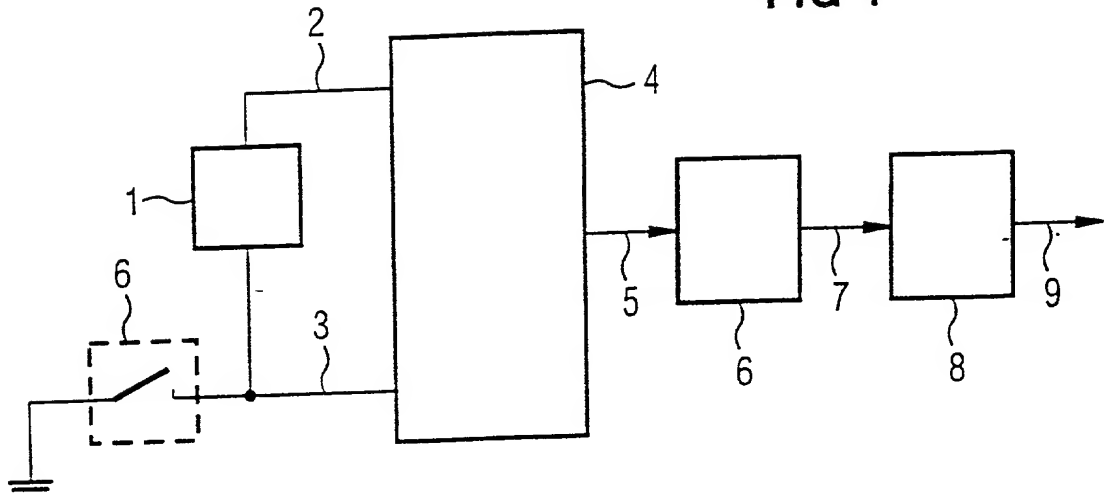


FIG 2

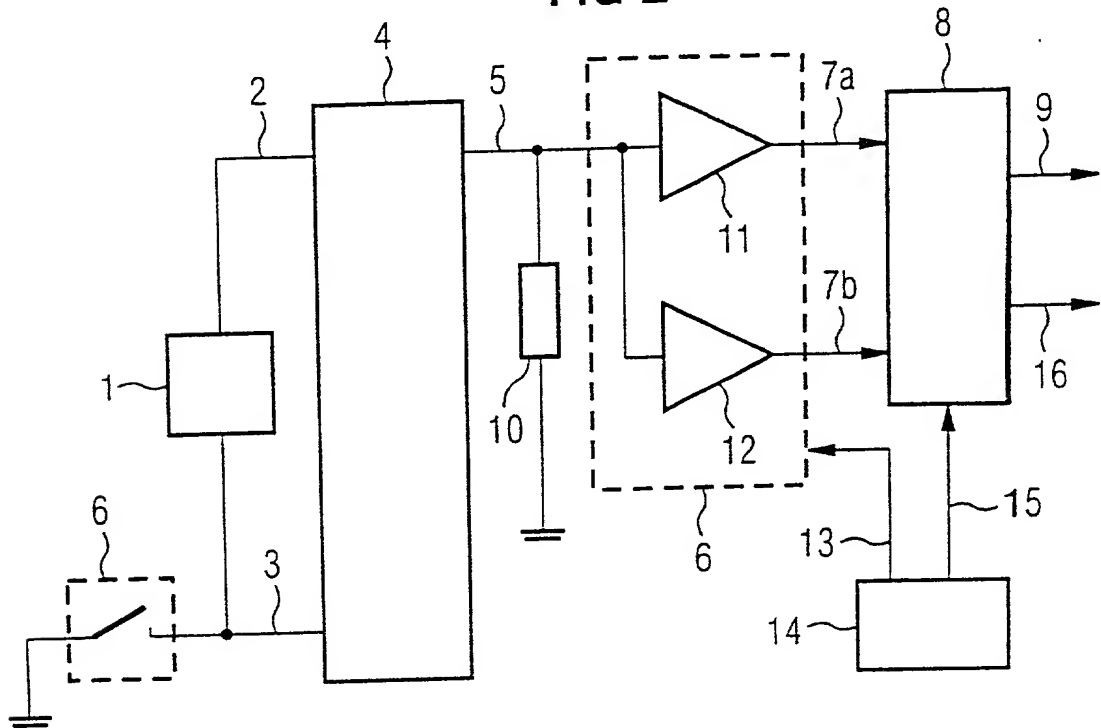


FIG 3

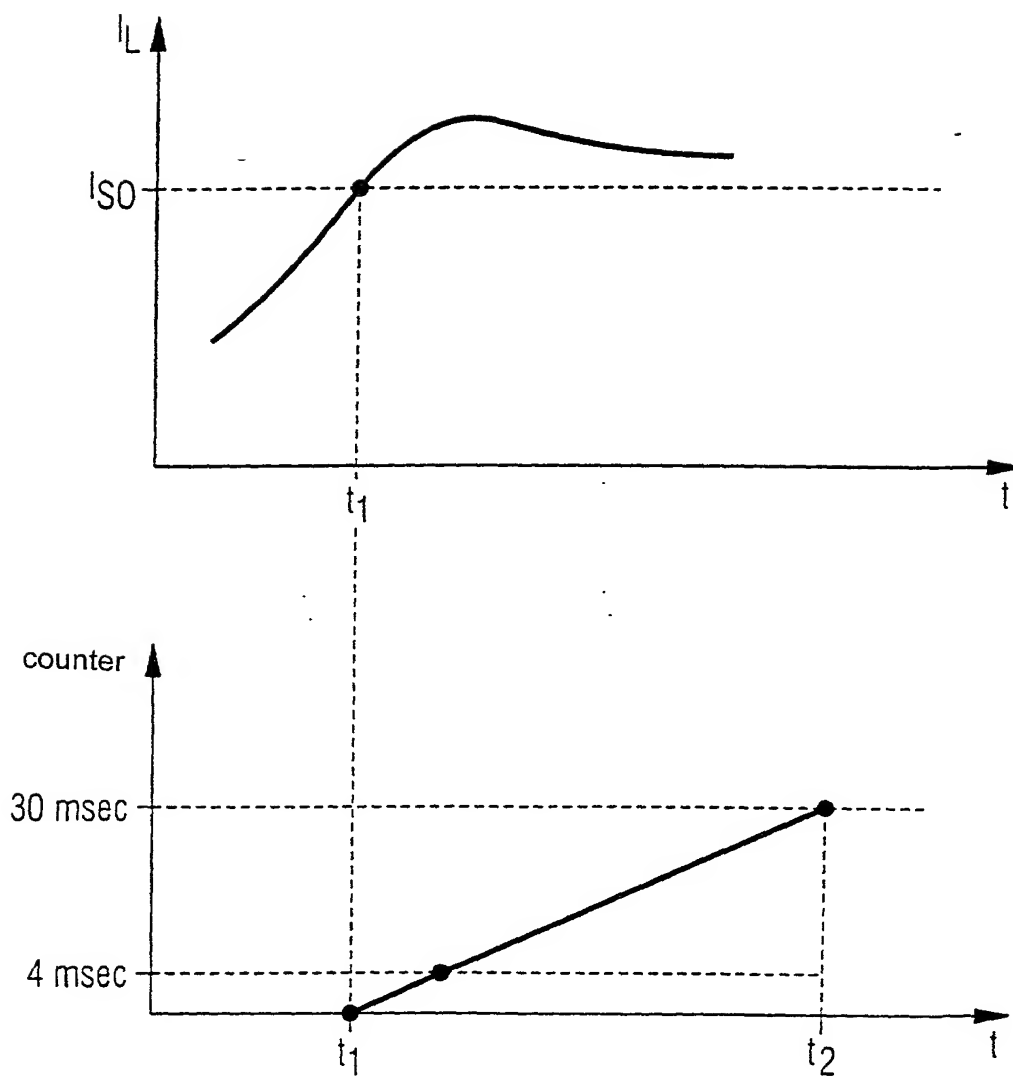


FIG 4


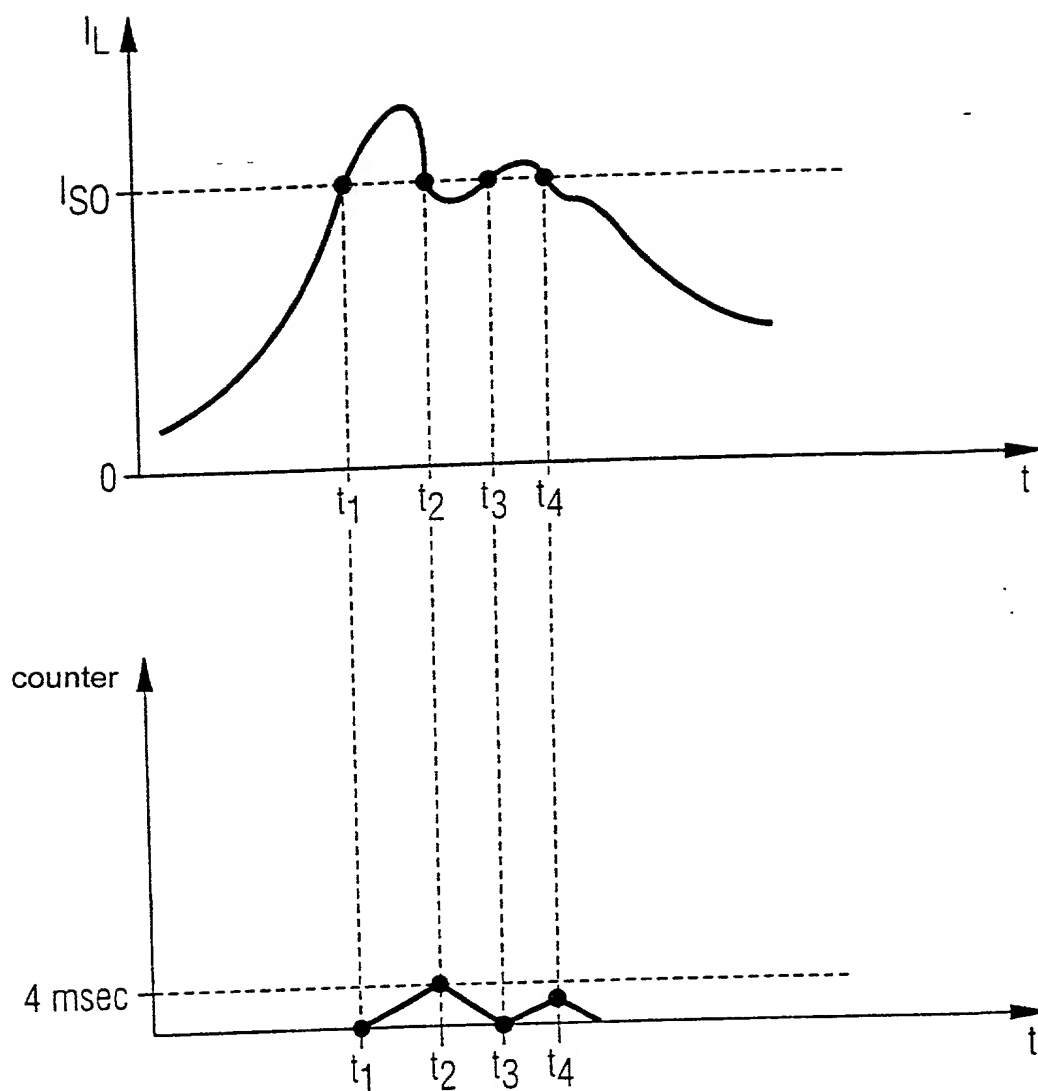


FIG 5

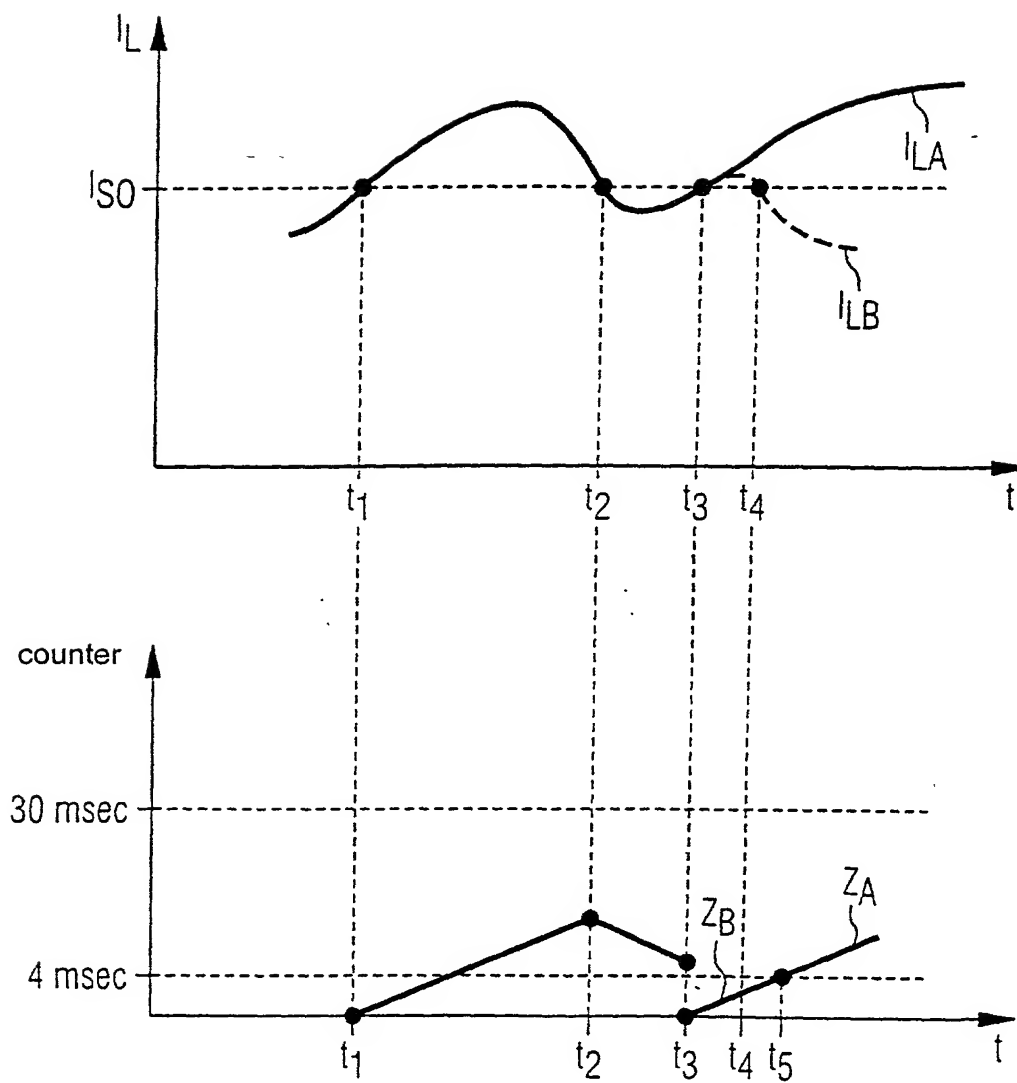

Attorney's Docket No.: 12816-036001
Client's Ref. No.: S1139 GC/rfu

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled GROUND KEY DETECTION CIRCUIT AND METHOD FOR INTERFERENCE-RESISTANT DETECTION OF THE ACTIVATION OF A GROUND KEY FOR TELEPHONES, the specification of which:

- ☐ is attached hereto.
☒ was filed on December 7, 2001 as Application Serial No. 10/009,747 and was amended on _____
☒ was described and claimed in PCT International Application No. PCT/DE00/01770 filed on May 30, 2000 and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
Germany	199 25 886.4	June 7, 1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Alan D. Smith, Reg. No. 32,005
J. Peter Fasse, Reg. No. 32,983

Frank R. Occhini, Reg. No. 35,306
Faustino A. Lichauro, Reg. No. 41,942

Address all telephone calls to FAUSTINO A. LICHAUICO at telephone number (617) 542-5070.

Address all correspondence to FAUSTINO A. LICHAUICO at

FISH & RICHARDSON P.C.
225 Franklin Street
Boston, Massachusetts 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

"426001"

05-04-02

15:21

VON -Reinhard. Skuhra. Weise Patentanwälte

T-640

P.005/005

F-810

05-04-02

15:21

VON -Reinhard. Skuhra. Weise Patentanwälte

T-640

P.005/005

F-792

Attorney's Docket No.: 12816-036001
Client's Ref. No.: S1139 GChfu

Combined Declaration and Power of Attorney
Page 2 of 2 Pages

Full Name of Inventor: 100 GERHARD NOSSENG

Inventor's Signature:

Residence Address:

Citizenship:

Post Office Address:

VillachAustriaRichtstr. 8A-9500 VillachAustriaDate: 4.4.2002

20404336.doc

20404336.doc